


# AGENT<sup>™</sup> BATON

The combination of discreet concealment and rapid presentation make the Agent Baton an ideal impact weapon for administrators, investigators and undercover operatives. The baton incorporates a 4140 steel striking surface. The 7075 T6 aluminum middle shaft and finely knurled clip ring grip are forged to shape and then precision machined. The shafts of the Agent Baton are Black Chrome plated.

The Agent Baton expands to a 16 LeverLoc.<sup>®</sup> It has the form, fit and striking potential of a duty baton. The reduced diameter, low profile grip of the Agent may be concealed inside the waistband or worn on the belt. The Snap-Loc<sup>™</sup> Clip may be adjusted to a variety of positions along the handle to enhance concealment or ease of presentation. As with all LeverLoc Batons, the Agent is retracted with a simple twist.

## **Agent Baton**

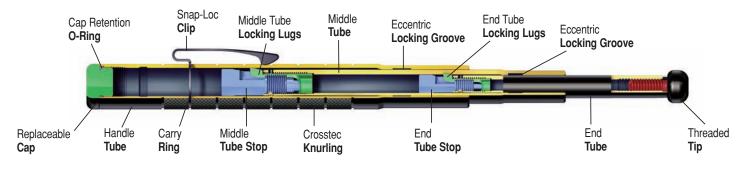

#### Background

Custom formulated tubing High strength Custom drawn

#### Specifications

Retracted Length7.75"1Expanded Length15.75"4Diameter.875"2Weight7.3 ounces2Locking SystemLeverLoc®

19.69 cm

40.00 cm

2.22 cm

207 grams

#### Steel Tubing

4140 49-57 RC 240,000 PSI tensile 225,000 PSI yield

#### Aluminum Tubing

7075 T6 87 RB 83,000 PSI tensile 73,000 PSI yield

#### Striking Surface

4140 steel Black Chrome plated



Carry your Agent<sup>™</sup> Baton in your pocket, on a dress belt or inside your waistband.

Middle Tube 7075 T6 aluminum Black Chrome plated LeverLocs

High carbon steel Heat treated Electroless Nickel plated

Tube Stops High carbon steel Heat treated Electroless Nickel plated

### Tip

Carbon steel Black Chrome plated

Lever controlled lugs Eccentric cam groove

### **Crosstec Knurling** on the Agent Baton provides a secure grip without causing abrasion.



Crosstec knurling Fine line knurling Spiral micro grooves Machined clip rings One inch on center Hardcoat anodized

#### Сар

Black Chrome plated O-ring sealed

Snap-Loc Clip .040 thick Heat treated spring steel Black Chrome plated





Maintenance Kits are available to service your Agent Baton.



**Retract** your Agent Baton by stabilizing the end tube. Rotate the middle tube clockwise while pressing the end tube inward. Then stabilize the middle tube. Rotate the handle while pressing the middle tube inward.





 $\begin{array}{l} \textbf{Snap-Loc}^{\text{\tiny TM}} \text{ clips} \\ \text{are removable.} \end{array}$