

The Triad® USB adds a micro USB charge port, internal charge circuit and Lithium-Ion power cell to the ASP signature design. Premium Triad features remain. A foamed vinyl grip complements a matte black Type III hardcoat anodized aerospace aluminum body. The four cut switch rotates to an Intermittent · Locked · Constant position. A replaceable belt clip may be attached lens up or lens down. All connectors and springs on the Triad USB are gold plated. The electronic circuit board drives a Cree XPG2 R5 LED to 300 lumens as measured against the ANSI FL-1 Standard.

Loosening the head of the Triad reveals the micro USB charge port. Attach the retractable charging cable to the supplied car charger, wall charger or to a computer USB port. Even a micro USB cell phone charger can be used to recharge the Triad USB. The battery indicator of the Triad blinks red when charging. It turns solid green when fully charged. The wall charger, car charger and retractable charge cord are encased in a zippered ballistic carrier. The car charger and wall charger have a blue LED indicator to confirm that the power source is active.

Dual fuel technology of the Triad USB allows use of CR123A primary cells. The batteries are unaffected by the Triad USB charge circuit.

Rapid to charge. Simple to use. The Triad USB by ASP. Simply Brilliant.




· 300 Lumens (ANSI Standard)

- · 3 Hour Run Time
- · Micro USB Charge Port
- · Charge Indicator
- Type III Hardcoat Anodizing
- · Foamed Vinyl Grip
- · Reversible Pocket Clip
- · Intermittent · Locked · Constant Switch
- · 6.25" Long
- · 18650 & Link Case
- · Zippered Travel Case



# Triad usb . . . Simply Brilliant

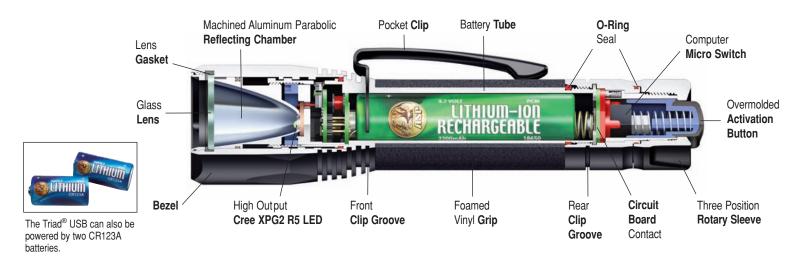

Background

Designed to professional law enforcement standards

Aerospace aluminum construction

Precision machined

No sharp edges

O-ring sealed for maximum water resistance

Distinct profile

Specifications

6.25" 158.7 mm Length 1.4" Diameter 35.6 mm 190.5 grams Weight 6.72 ounces

(with batteries)

System 3.7 volt

Flashlight Output 300 lumens (ANSI Standard)

Body

6061 T6 high strength aluminum

Matte black finish

Type III hardcoat anodized

Coated threads for durability

Exterior and interior scratch and corrosion protection

Foamed vinyl grip Front clip groove Rear clip groove

**Pocket Clip** 

Detachable

**Power Cell** Proprietary

Rechargeable

18650 Lithium-Ion battery

3.7 volt

2200 mAh PTC protected

PCM protected

Overcharge protection

Fast discharge protection

Short circuit protection

3 hours continuous run time

Leak proof

Vibration resistant

Ten year shelf life Link case

**Charge System** 

Micro USB Flashing red charging

Solid green fully charged

**Power Cell Tube** 

Foamed vinyl grip

O-ring sealed

#### Locking Switch

Back mounted

Quick and positive switch location under stress

O-ring sealed activation button

Locked (center)

Constant on/off switch activation (right)

Intermittent switch activation (left)

O-ring sealed switch cover

PC board positive circuit contact

Sensitive and quiet switch activation

Computer micro switch controlled

Self-cleaning (no carbon buildup)

Fail safe (backup) switch circuits

Replaceable modular switch assemblies

O-ring sealed connection to the light body

Rotate one full turn to prevent accidental activation

#### Reflector Assembly

Parabolic

Extremely durable

Computer calculated ray traces

Long distance penetrating beam

Room illuminating halo

Gasket sealed

#### **LED Assembly**

Cree XPG2 R5 LED

Proprietary heat management Custom driver

Smart chip technology

Gasket sealed

# **Belt Case**

injection molded

### **Travel Case**

**Ballistic Weave** 

Zippered

## Warranty

Limited Lifetime







Intermittent



Locked



Constant





Charging Accessories are ASP designed to provide peak performance with a compact profile.

**TLC** Tactical Light Cases protect and securely retain the Triad.



