

TACTICAL DEFENDER®

Police Strength

- · Low Profile
- · Easily Carried
- · Quick Firing



Airweight® offers a 45% weight reduction with 98% of the striking potential of steel.



the most durable and corrosion resistant black baton finish available.



Chrome delivers a high lustre finish for increased visibility under low light conditions.




Electroless[®] is the most corrosion resistant finish. It is well suited to high humidity environments.

The fine line between OC and the need for a baton can be crossed in an instant by a determined assailant. The Tactical Defender allows an officer to bridge that gap by placing two proven control tools conveniently in hand. Low profile. Compact. Rapidly deployed. The straight line activation system of the Defender OC is combined with the proven dependability of the ASP Tactical Baton[®].

The thumb safety of the Tactical Defender employs a stainless steel post to block activation. Two distinct movements are required to disengage and then discharge a 10% concentration of Oleoresin Capsicum directly on target. Reapplication of the safety at any time is rapid and reflexive should the ASP Baton be required.

The Tactical Defender can be carried in all Series 26 ASP Federal[®] and SideBreak[®] Scabbards. Replaceable Heat[®] Inserts dispense two million Scoville Heat Units of OC in a cone shaped pattern. Inert (Test[®]) Inserts are ideal for training. An adapter allows the use of Palm[®] Inserts in situations where a reduced volume of Heat or Test is desired.

ASP Tactical Defender... Straight Line Protection

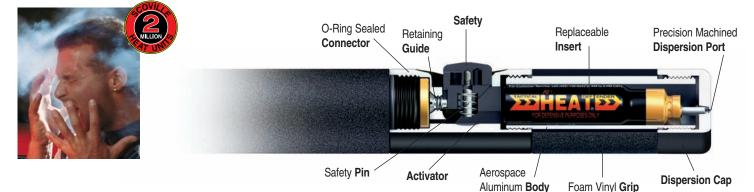

The Safety (shown in

activate) is rapidly

released.

the off position, ready to

The Tactical Defender® may be purchased as a stand alone unit that attaches to ASP Batons. It is also available as part of the Fusion Series. This highly successful baton combines an F16 with the Tactical Defender creating one compact, easily employed control tool.

Background

Designed to professional law enforcement standards Aerospace aluminum construction Precision machined No sharp edges O-ring sealed Interchangeable components Replaceable aerosol Inserts

Specifications

Length	4"	101.6 mm
Diameter	1"	25.4 mm
Weight	3.3 ounces	93.6 grams
System	Straight line activation	า

Body

6061 T6 aerospace aluminum construction Matte black hardcoat anodizing Coated threads for durability

Safety

Extremely secure Rapidly released Stainless steel safety pin Replaceable Machined Delrin® Slide away design Positive activation blockage

Activation

Concentric ring slide Requires two distinct movements





Dispersion Cap O-ring sealed May be used as a baton cap Tapered stem seat Precision machined dispersion port Tactical Black Optional Gold Band **Optional Silver Band** Inserts

Readily replaceable World's smallest aerosol cans Seamless aluminum Impact extruded Precision spring valve Extra long ferrule Gasket sealed Horizontal discharge Cone-shaped dispersion Laser engraved expiration date (Heat) Test® Inert

Training module

Heat[®] Oleoresin Capsicum 2 Million Scoville Heat Units 10% formulation Optional custom formulations





Palm Defender® Inserts

3 grams











Palm Defender Inserts



Defender Inserts are compact, easily replaced and date coded (Heat only) to assure reliability.



Palm Defender Conversion Tube



Defender.





