


ASP Aluminum Handcuffs . . . the Lighter Side of Control



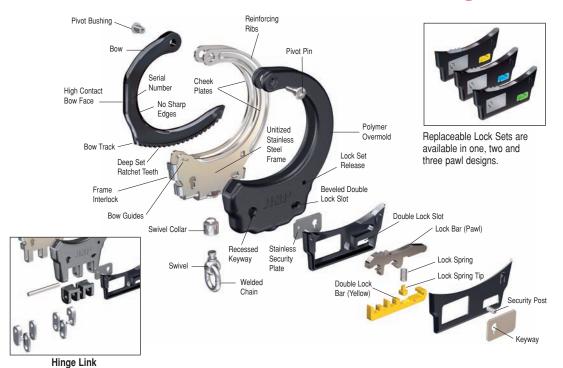

Chain cuffs are flexible and more easily applied during a confrontation. Hinge cuffs provide more restricted control of large subjects. Rigid cuffs provide added security during transport.

Background

Precision formed Stainless steel frame

- * Polymer overmold
- * High contact face No sharp edges
- * Permanent color options Extremely lightweight
- * Interchangeable Lock Set
- * Recessed keyway Two-sided double lock
- * Double lock indicator (colored)
- * Two-sided lock release
- * One-direction single and double lock release

9.4"

(*) A Patent Pending exclusive ASP feature

Specifications

Length Chain

Hinge 9.2" 234 mm Rigid 9.2" 234 mm Width 3.125" 79 mm Weight Chain 7 ounces 198 grams

239 mm

Hinge 8.5 ounces 241 grams
Rigid 10.7 ounces 303 grams
System Replaceable Lock Set
Construction Overmolded stainless steel
Edge Radius .035" minimum (1 mm)

Frame

Computer designed Flex Frame Technology Surgical stainless steel Precision die struck Reinforcing ribs Bow guides Interlocking cheek plates Unitized assembly Polymer overmold Permanent color

Chain Link

Stainless steel Free rotating swivel Reinforcing swivel collar

Hinge Link

Stainless steel Four point rotation

Rigid Link

Stainless pivot bars (2) Two point rotation Dual extension locking Automatic rigidity

Lock Set

Replaceable
Dual keyways
Stainless security block
Stainless security posts
Dual double lock slots
Color coded double lock indicator
Dual release lock bar (pawl)

One pawl (Yellow)
Two pawl (Blue*)
Three pawl (Green)
Single spring double lock bar
Hardened keyways

* Requires a Custom Key

Bow

Conical geometry Integral frame track Deep set teeth High contact face Serial numbered Stainless pivot pin

Warranty

Limited Lifetime





NO ADMITTANCE